



LifeSmart



Contents

Company Introduction	01	Solutions&Success Stories	85
Brand Introduction		Smart Residential	
Investors		Smart Hotel	
Awards		Smart Office	
Patents&Certifications			
		Contact Us	
Core Competitive Advantage	05		
Open AIoT Ecosystem			
CoSS&Other Protocols			
AI Builder			
Cybersecurity			
Multi-dimensional Interaction			
LifeSmart Design Lab			
Product Category	15		
Smart Interaction			
Smart Station			
Smart Lighting			
Home Security			
Smart Shading			
Smart Thermostats			
Energy Management			
Smart Entertainment			

LifeSmart is among the top brand list to provide smart home products and solutions on the global market. We offer complete categories of smart devices, integrating advanced IoT technologies and cloud services, to form the base of both smart home solutions and other industrial solutions.

100+
Countries/Regions

4M+
End Users



Angel
Tisiwi



Series A
SAIF Partners




Series B
Walden International BridgeOne Capital



Series C
New World China



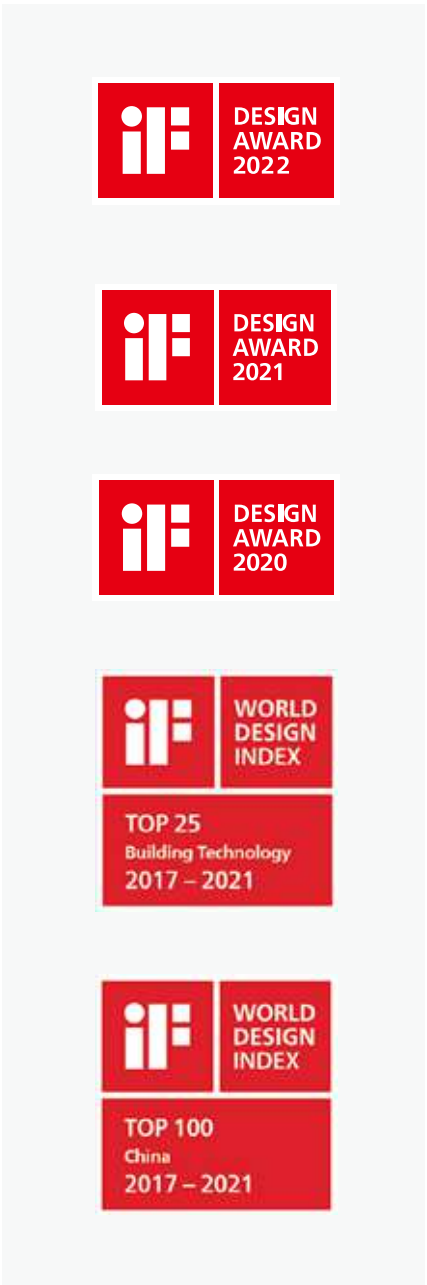


200+ Patents

LifeSmart's R&D personnel account for more than 50% of the total staff, and we own more than 200 domestic and international core technology patents.



20+ Certifications

LifeSmart attaches great importance to product safety and quality, our products have passed various product certifications around the world, including CE, WEEE, FCC, KC, TELEC, etc.

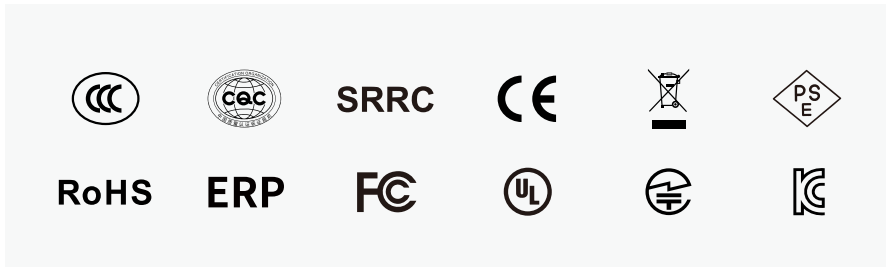


80+ Awards

LifeSmart has always adhered to the modern minimalist design style where technology and beauty coexist. We pursue the balance of design, user experience and product functions.

Since 2016, our products have won more than 80+ international awards including the grand slam of the world's top design awards.

Open AIoT Ecosystem

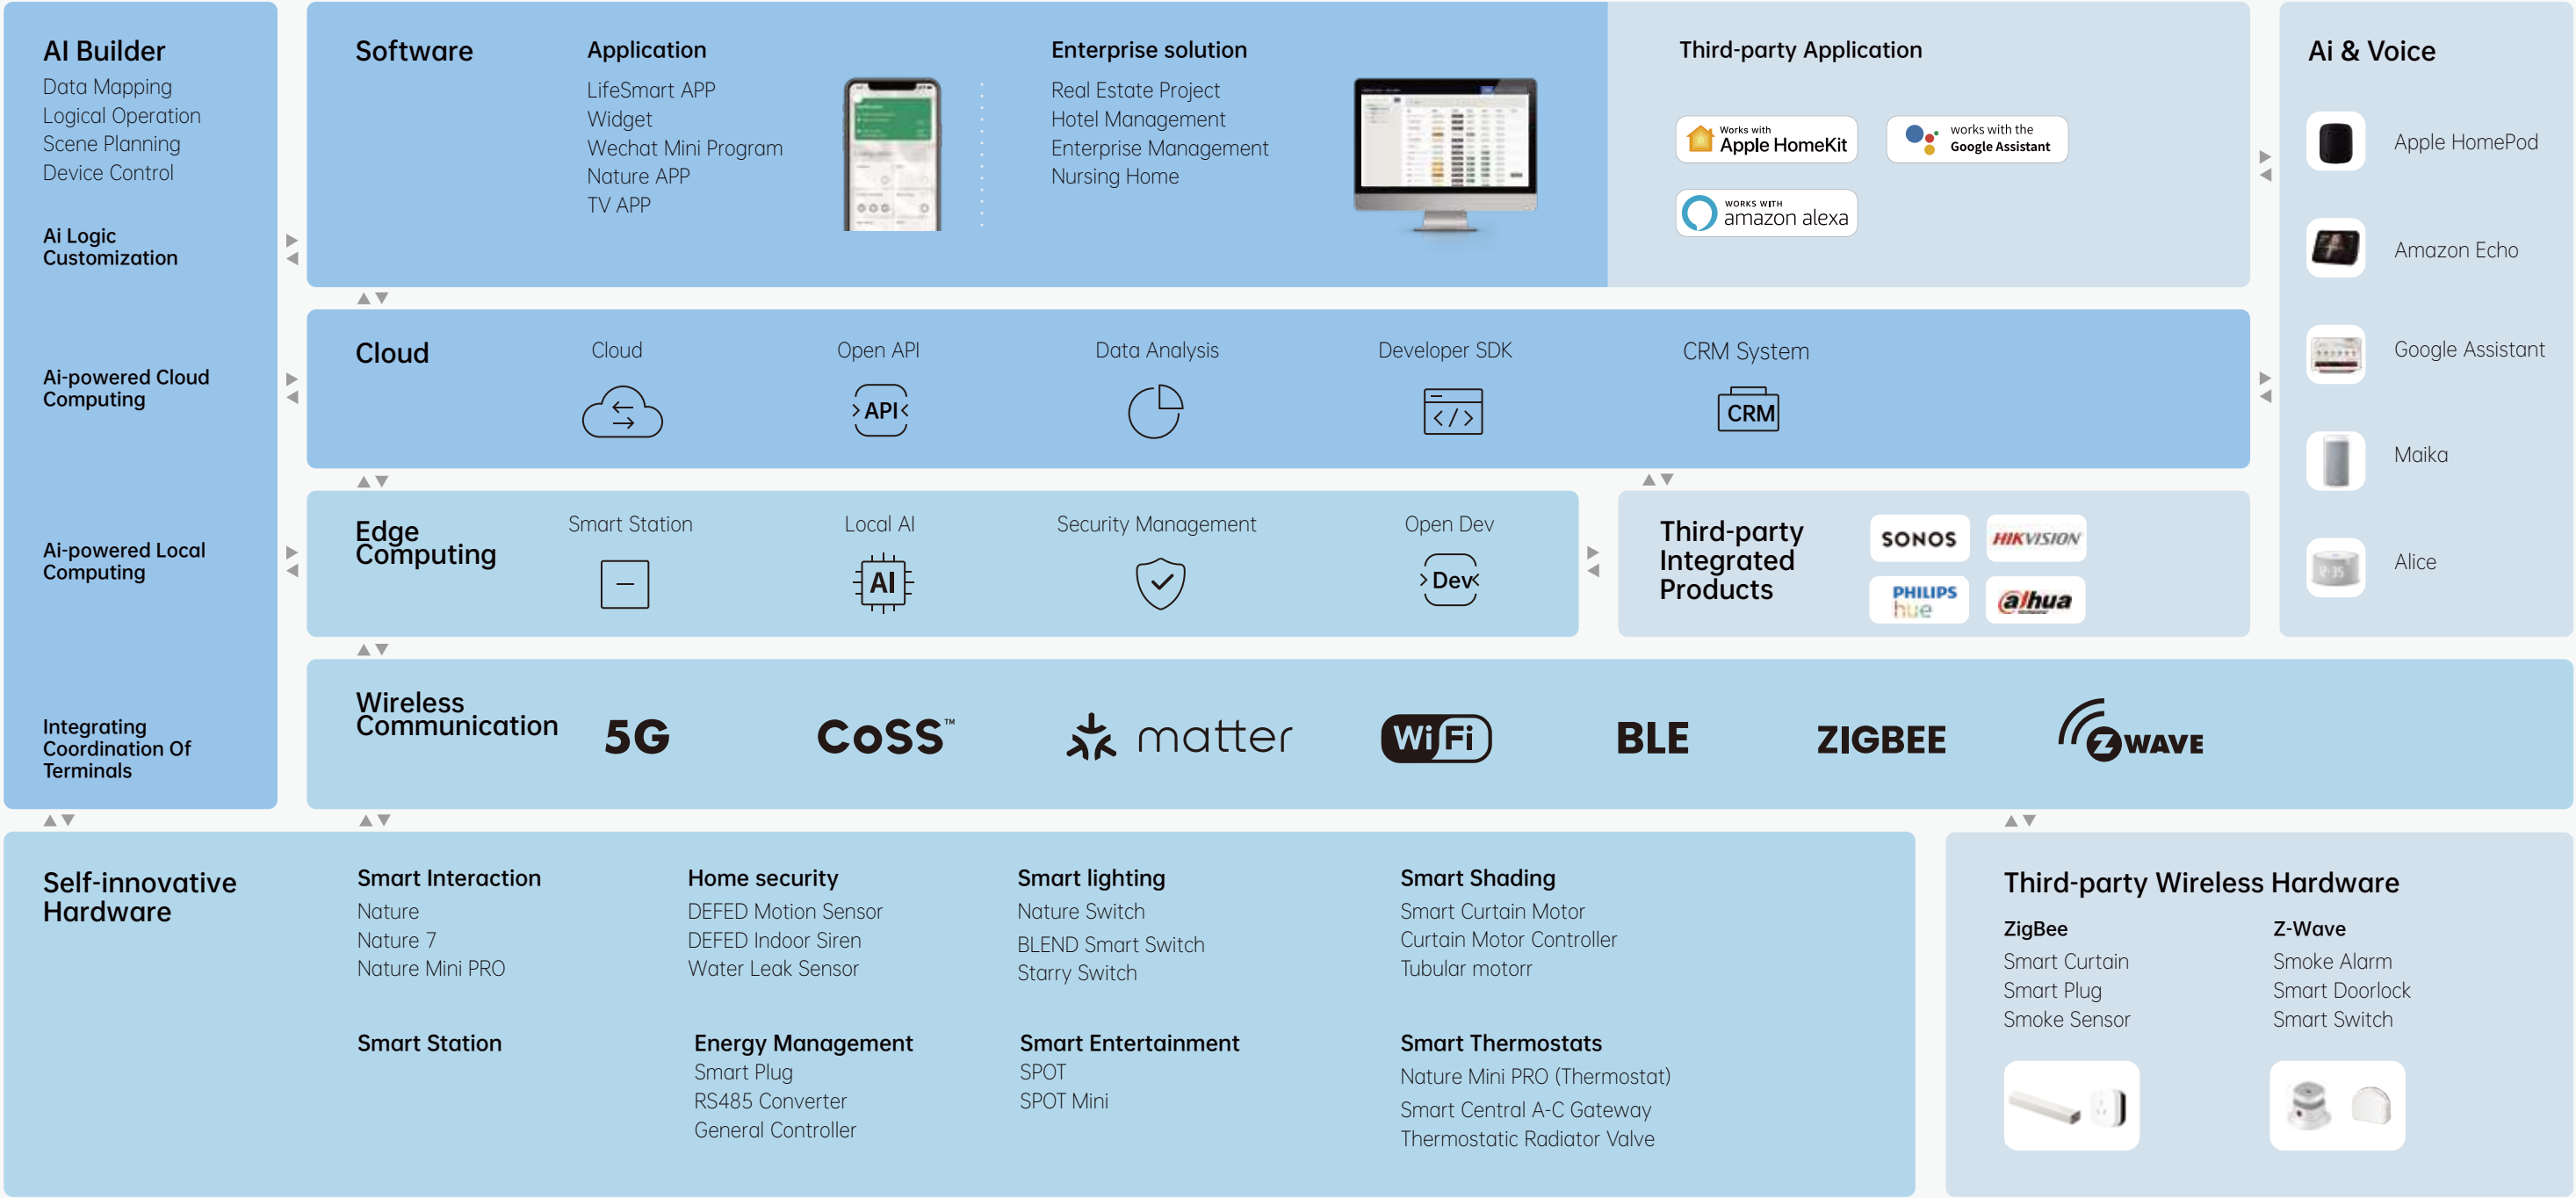


A solid cloud architecture, a wide range of hardware products, multi-dimensional software interaction, and a powerful voice ecosystem have jointly constructed an open and complete ecosystem of LifeSmart, creating values for our partners and users.








CoSS - a wireless communication protocol that is as stable as a wired network

Communication of Smart Star Network (CoSS) is a new IoT communication protocol independently developed by LifeSmart to achieve communication interconnection and automation for IoT devices. CoSS adopts wireless connection technologies comparable to wired connection technologies.

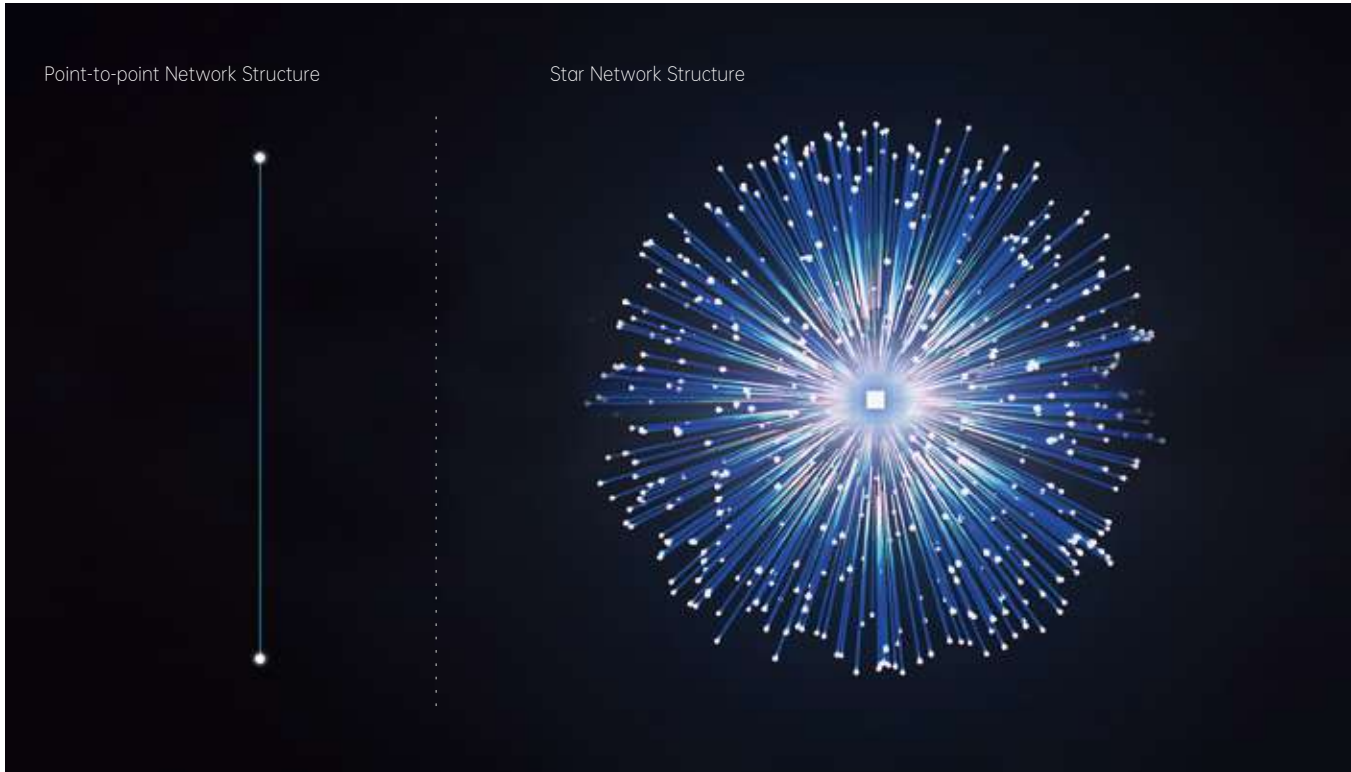Specially designed for IoT, CoSS defines the communication model, data structure, and interaction format on the physical layer, link layer, and application layer; In CoSS, the design for RF communication is optimized, which greatly simplifies product development processes. The model integrity is maintained, as well as the simplicity and stability of the protocol, providing a solid basis for the management and intellectualization of devices.

-  **Long Distance**
Transmission of 800 meters
-  **Low Power Consumption**
Ensuring 10-year battery life of a no-neutral switch
-  **Low Radiation**
1/100,000 of the radiation from a cellphone
-  **High Stability**
Telecom-level communication standard
-  **High Security**
Restricted access and multiple encryption
-  **Large Capacity**
Support up to 500 sub-devices



	CoSS				
Transmission Distance	100- 800meters	30-100meters	40-100meters	20-100meters	40meters
Wall Penetration	High (433-922Mhz)	Low (2.4Ghz)	High (868-922Mhz)	Low (2.4Ghz)	Low (2.4Ghz)
Power consumption	Extremely Low	Low	Low	Low	High
Stability	High	High	Low	Low	Low
Capacity	High	High	High	High	Low
Bandwidth	Low (1kbps-128kpbs)	High (256kbps)	Low (9.6kbps/40kbps)	High (1mbps)	Extremely High(>54mbps)
Radiation	Low	Low	Low	Low	High
Standardization	Private	Standard	Standard	Standard	Standard
Cost	Medium-High	Medium-High	High	Medium-High	Medium-High
Configuration	Easy	Easy	Easy	Easy	Difficult

We Are The Brand Supporting the Most Wireless Communication Protocols on the Market

We Are The Brand Supporting the Most Wireless Communication Protocols on the Market

In the field of IoT, we firmly believe that the future belongs to wireless communication protocols. We always take customers' value as our top priority and select the wireless communication protocols that are most suitable for users' cases. We provide products supporting the most protocols on the market, including Wi-Fi, BLE, Zigbee, Z-Wave, and our independently developed CoSS. For video-related applications and some smart products, we use Wi-Fi. For personal consumer electronics, we use Bluetooth or a combination of Bluetooth and Wi-Fi. Granted with the Z-Wave Security S2 certification in Japan, we are the first Chinese company to receive this certification.




AI Builder

Bringing Intelligent Editing to a Higher Level

LifeSmart AI Builder is an intelligent editor supporting any condition combinations + any device execution actions. You can use the editor in graphic and list mode.

For example, multiple intelligent agents usually need to be created for an intelligent scenario where "the light and air conditioner need to be turned on when people show up during work hours, the light needs to be adjusted for the lunch break, and the light and air conditioner need to be automatically turned off after working hours or during holidays".


However, with LifeSmart AI Builder, you only need to create one intelligent agent to realize such a complicated multi-condition logic

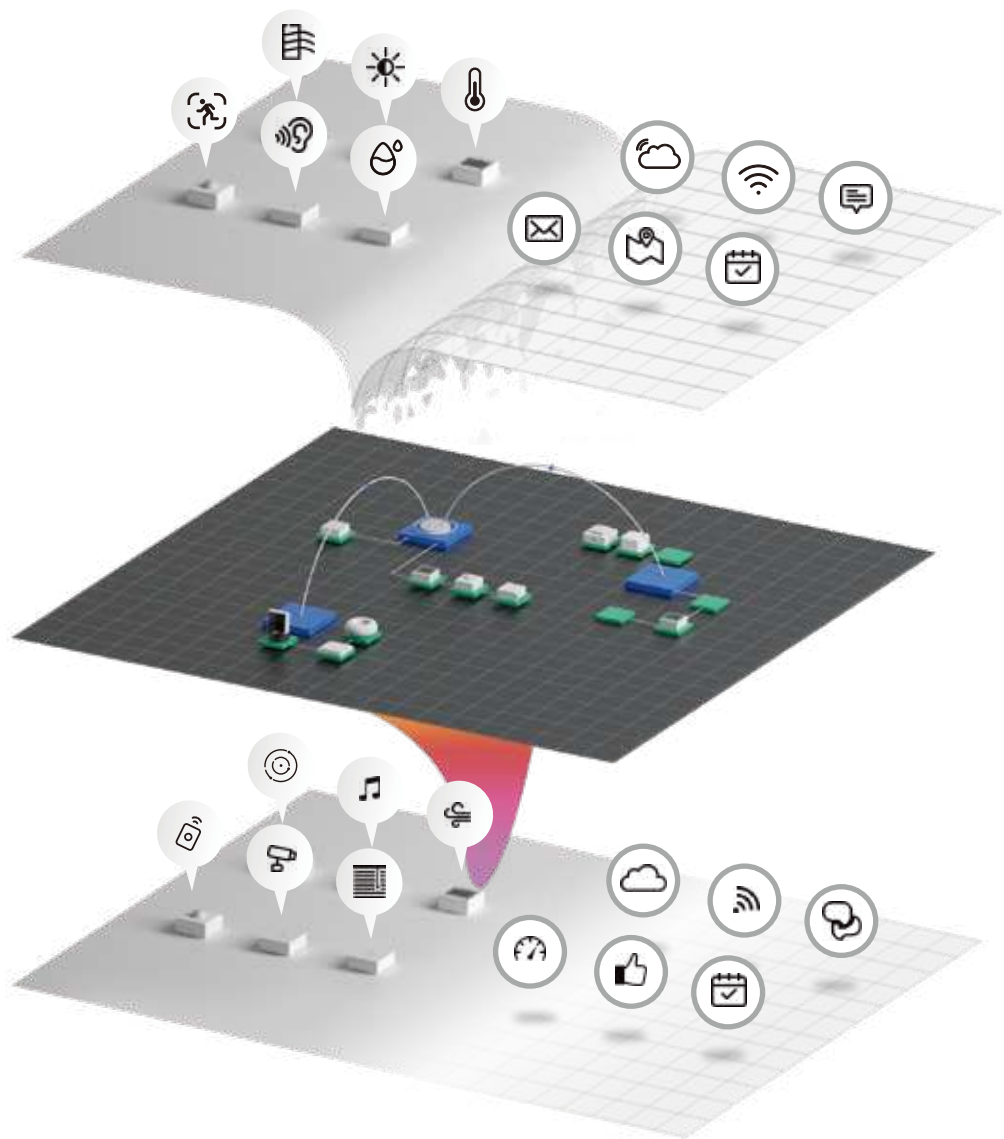

Cybersecurity

Bank Level Encryption

- Z-Wave Security S2 certification
- Independent key management for every single device
- Minimum authorization management for cloud service
- All data encryption

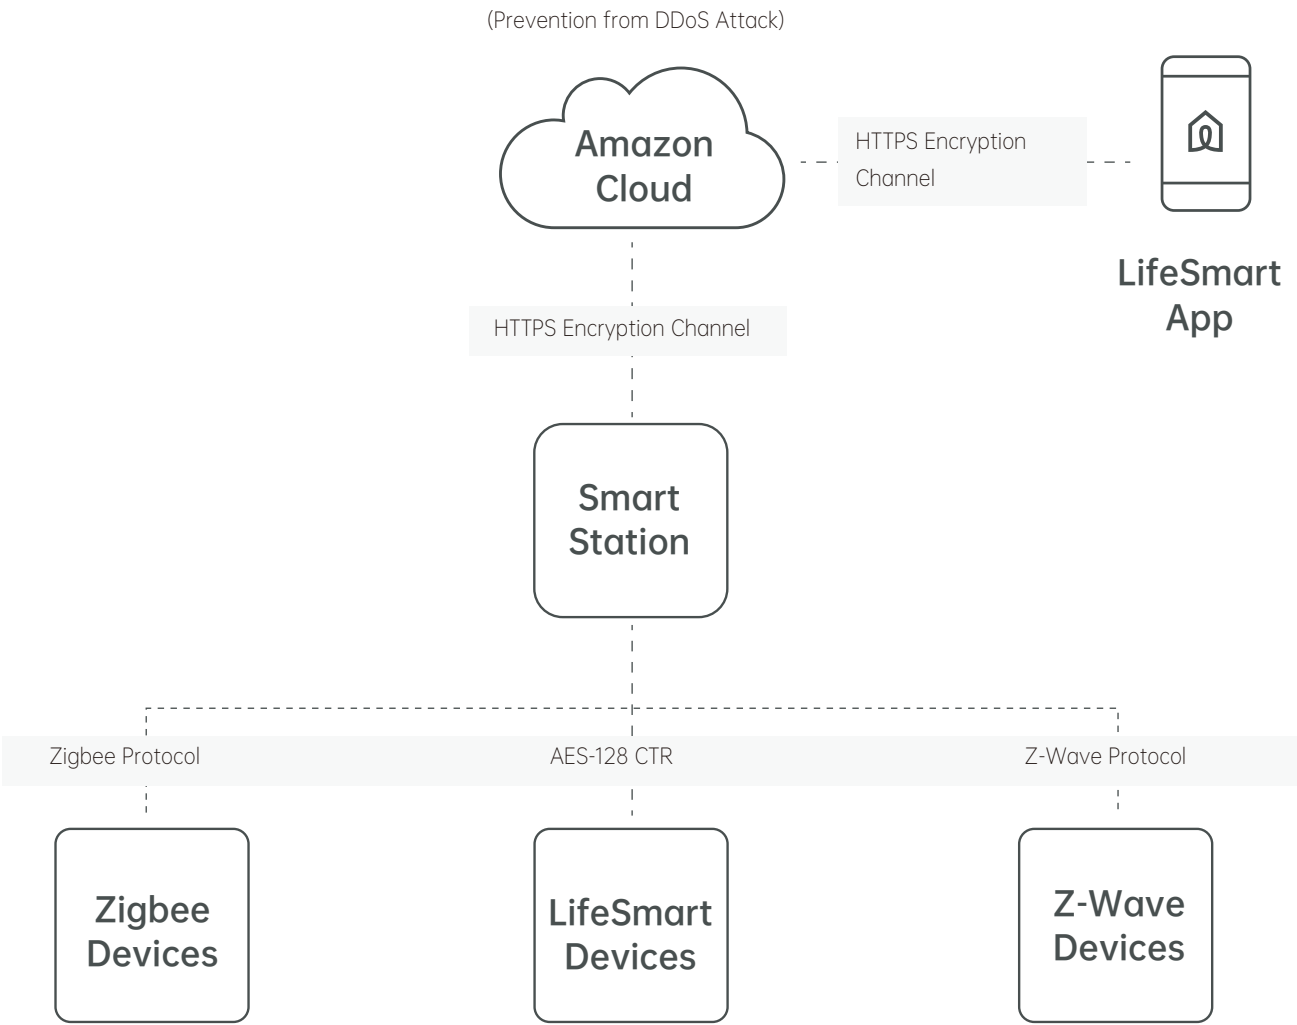

Bank Level Encryption and Security

LifeSmart puts the cybersecurity and privacy protection as the top priority since day one. We build our system and connection with bank level encryption and security, from the smart device, edge gateway, cloud service to the applications, all the links in between are encrypted and protected.

Privacy by Default

More over, we monitor and enforce compliance to meet industry standards and security policies such as GDPR, and we actively detect and stop the advanced threats, keep it away from our customers.

Multi-dimensional
Interaction Experience

Smart Home is about the interaction between people and space. LifeSmart is committed to developing different interaction modes between users and their homes from multiple dimensions.

Through the powerful self-developed software and the open ecosystem, LifeSmart cuts in from the dimensions of sound, vision, gestures, senses, and living habits to optimize users' interactive experience.



LSD
LifeSmart Design Lab

Simplicity isn't simple
Refining Relationship between Product,
Home, and People

LSD™ hinges on the design concept of simplicity. This concept brings simplicity to the product appearance and highlights its visual focus; In fact, we are more concerned about the simplicity in product usage. Using limited information, LSD™ presents functions that are most direct and mostly comply with the instinct, to keep clear logic in complications. In this way, people will follow their instinct only to focus on important information and use our products, with no strange feelings of technologies. To make the smart home more simple, friendly, and touchable is the ultimate goal of the design by LSD™.



Product Category

Smart Interaction

Nature Series Smart Home Control Panel

LifeSmart APP

Smart Station

Smart Lighting

Home Security

Smart Shading

Smart Thermostats

Energy Management

Smart Entertainment





Nature X PRO



Your First Smart Device

- Works as a gateway
- Supports multiple protocols including CoSS, Zigbee, Wi-Fi
- Supports Type-C power supply
- 1.39-inch resolution 454*454 OLED knob screen
- App control
- Communicates with other devices



General

Model Number	LS280-AQ
Operating Temperature	-5~45℃
Operating Humidity	5~90%
CPU	Quad-core Cortex-A7
Interface	Type-C Power input
LED Indicator	9+4 16 million colors LED
Screen	1.39 inch
Resolution	454*454
Input	DC 5V 2A

Sensor	Temperature sensor, Humidity sensor, CO ₂ sensor, PM2.5 sensor
Microphone	Yes
Speaker	Yes
CO2 sensor	0~500ug/m3
PM2.5 sensor	400~2000ppm
Content	Nature X PRO, USB-C cable, Users' guide
Operation System	Android

Construction

Color	Black
Casing	ABS + Zinc alloy
Size	143*112*98mm
Weight	900g

Radio

Radio Protocol	CoSS, Zigbee, Wi-Fi
Signal Range (Open Field)	200m(CoSS)

SMART INTERACTION





Nature - Smart Control Panel



The all-in-one smart control panel serving as a personal butler



10.25" High definition touch screen



Configurable built-in menu to meet your needs



Customizable physical buttons to switch scenes



Elegant anodized aluminum craft



App control



Communicates with other devices



General

Model Number	LS148
Installation	In-wall concealed with pre-embedded back box(standard)
Operating Temperature	-5~45℃
Operating Humidity	5~90%
Network	Wi-Fi 2.4GHz/ Ethernet
Power Consumption	<20W
Interface	Live/Neutral/Earth wire in
	Ethernet RJ45
	HDMI in
	USB

Button	Customizable scene-switch button×4
	Power button
Screen	10.25 inch touch screen
Resolution	1920×720
CPU	4 Core ARM
Power Supply	AC 100-240V 50/60Hz
RAM	2GB
Oprating System	Android 5.1
Speaker	Yes
Microphone	Yes

Construction

Color	Matte grey
Dimensions	Exposed dimension: 342*122*16mm
	Backbox dimension: 335*114*70mm
Weight	1260g(panel only)
Casing	Aircraft aluminum



Nature 7 PRO

The all-in-one smart control panel with a 7-inch HD touch screen and 4 customizable physical scene button

-  7" High definition touch screen
-  Configurable built-in menu to meet your needs
-  Customizable physical buttons to switch scenes
-  Anti-fingerprint coating
-  PoE power supply

-  App control
-  Communicates with other devices



General			
Model Number	LS227	Resolution	1024×600 (IPS)
Installation	In-wall concealed with pre-embedded box(standard)	CPU	4 Core A55
Operating Temperature	-5~45℃	RAM	2GB
Operating Humidity	5~90%	Oprating System	Android 11
Power Supply	DC 12V/PoE 48V	Speaker	Yes
Power Consumption	≤6W (without power output)	Microphone	Yes
Interface	RJ45×1,Extension(1+8way sense,RS485)	Network	Wi-Fi 2.4GHz, LAN port, Zigbee, CoSS,
Button	Customizable scene-switch button×4, Power button		
Screen	7 inch touch screen		







Construction	
Color	Matte grey
Dimensions	Exposed dimension: 249*113*16mm Whole product dimension: 249*113*28.6mm
Weight	525g
Casing	PC



Nature Mini PRO

The only thing we changed is everything



-  Anti-fingerprint HD full-color touch screen
-  Multi-protocol wireless transmission protocol
-  2.4GHz+5GHz Dual-band Wi-Fi
-  Ultra low power
-  App control
-  Communicates with other devices



General	
Model Number	LS268
Installation	In-wall concealed with 86 back box
Operating Temperature	-5~45℃
Operating Humidity	5~90%
Power Supply	AC 100-240V 50/60Hz
Power Consumption	< 0.6W
Maximum Overload	Resistive Load 500W (One Way) Capacitive/Reductive Load 200W (One Way)
Wireless protocol	Wi-Fi / CoSS / ZigBee
Network	Wi-Fi 2.4GHz+5GHz
Wiring	Live/Neutral/Light1/Light2/Light3 wire in
Screen	4 inch
Resolution	480*480
Operation System	Linux
Speaker	Yes

Construction	
Color	White/Gray
Dimensions	Outside the wall:86*86*11mm; Whole product:86*86*36mm
Casing	Bottom Cover: PC, Top Cover: ABS+PC

Radio	
Radio Protocol	CoSS
Range(Open field)	200m

Nature Mini L

The only standard 120 Smart home control panel



Anti-fingerprint HD full-color touch screen



Multi-protocol wireless transmission protocol



2.4GHz+5GHz Dual-band Wi-Fi



Ultra low power



App control



Communicates with other devices



General

Model Number	LS218
Installation	In-wall concealed with 120 back box
Wireless Protocol	Wi-Fi / CoSS / ZigBee
Operating Temperature	-5~45°C
Operating Humidity	5~90%
Power Supply	AC 100-240V 50/60Hz
Power Consumption	< 0.6W
Maximum Overload	Resistive Load: 500W per channel Inductive/Capacitive Load: 200W per channel

Network	WiFi 2.4GHz+5GHz
Interface	Live/Neutral/Light1/Light2/Light3 wire in
Screen	4 inch
Resolution	480*800
Operation System	Linux
Microphone	Yes
Speaker	Yes

Construction

Color	White
Dimensions	Outside the wall: 120*70*11mm Overall: 120*70*36.5mm
Casing	Bottom Cover:PC, Top Cover:ABS+PC

Radio

Radio Protocol	CoSS
Range(Open field)	200m

Smart Station

Center of the smart home ecosystem and make all the devices work seamlessly

- 500

Powerful processor with up to 500 connected devices
- 800m

800m wireless signal distance
- AI

AI builder for automated processing
- Multiple-protocol support



App control

Communicates with other devices

Works with Apple HomeKit

works with the Google Assistant

WORKS WITH amazon alexa

Radio	Smart Station	Smart Station (CoSS+ZigBee)	Smart Station (CoSS+Z-Wave)
Radio Protocol	CoSS	CoSS & ZigBee	CoSS & Z-Wave
Radio Frequency	433or922MHz	CoSS: 433or922MHz / ZigBee: 2.4GHz	CoSS: 433or922MHz / Z-Wave 865.2~926.3MHz
Signal Distance (Open Field)	800m	CoSS: 800m / ZigBee: 30-100m	CoSS: 800m /Z-Wave: 40-100m

General		Construction	
Operating Temperature	-5~45℃	Color	Ivory white
Operating Humidity	5~90%	Dimensions	110.8*110.8*28mm
Power Supply	DC 5V	Weight	120g
Power Consumption	< 2.5W	Casing	ABS
Interfaces	Power supply / RJ45 / Reset hole		
Connected Devices	500		
Network	LAN(10/100/1000 BASE-T via RJ45 port)		

DEFED Smart Station

Smart station is the control center of the DEFED alarm system. It collects, processes, and reports every signal and information of the system

- CoSS, ZigBee, BLE, Wi-fi, Z-Wave(optional), 2G/3G/4G/5G/(optional),
- 2.4GHz+5GHz Dual-band Wi-Fi
- With the backup battery
- Tamper protection



App control

Communicates with other devices

General	
Model Number	LS205WH
Operating Temperature	-5~45℃
Operating Humidity	5~90%
Interface	RJ45
Power Supply	DC Power supply
	SIM card slot(optional)
	DC12V1A
	Battery Backup*2
Battery Life	PoE
	18 hours battery backup power
Battery type	Battery 18650*2

Construction	
Color	White
Dimension	170*170*37mm
Casing	ABS+PC

Radio	
Radio Protocol	CoSS, ZigBee, BLE, Wi-fi, Z-Wave(optional), 2G/3G/4G/5G/(optional),
Signal Range(Open Field)	500m

SMART LIGHTING



Nature Switch



reddot award 2021
best of the best

Touchable switch for designing your wall decor



Adopts Touch Pro™ technology and brings ultimate touch experience



With DIY colorful LED indicator, you can turn on the light easily in the dark



Design the icon depending on your needs, there are more than one million choices for you



Modern appearance, designed by Nature Series designer team who have collected all design awards



Voice control



App control



Communicates with other devices

General	
Model Number	LS220
Wiring	Live+neutral
Control Unit	16A magnetic latching relay
Operating Temperature	-5~45℃
Operating Humidity	5~90%
Power Supply	AC 100-240V 50/60Hz
Power Consumption	< 0.6W
Maximum Overload	Resistive load 500W (one way) Capacitive/Reductive load 200W (one way)
LED Indicator	16Million colors

Radio	
Radio Protocol	CoSS
Signal Range (Open Field)	200m







Construction	
Color	White glass+white frame /
	Black glass+white frame /
	Black glass+gray frame
Dimension	86*86*35mm
Weight	126g(1 way), 138g(2 way), 150g(3 way)
Casing	Bottom cover: PC, top cover: ABS+PC, front panel: glass






BLEND Switch PRO - No Neutral

The smart switch with LED strip, give you a cool experience.

-  Large and flat panel
-  Customized 16 million colors panel light
-  Simple modern design
-  Dual control,multiple control







-  Voice control
-  App control
-  Communicates with other devices



General	
Model Number	LS240-LW1/2/3、LS240-LG1/2/3
Installation	In-wall concealed with 86 back box
Wiring	Live wire access, first line live wire exit, second line live wire exit, third line live wire exit
Operating Temperature	-5~45°C
Operating Humidity	5~90%
Power Supply	90V-250V AC , 5V-30V DC
Power Consumption	<1mW
Maximum Overload	Resistive load:500W per channel Inductive/Capacitive load:200W per channel
Battery Type	CR123A
Radio	
Radio Protocol	CoSS
Range(Open field)	200m

BLEND Switch PRO

The smart switch with LED strip, give you a cool experience

-  Large and flat panel
-  Customized 16 million colors panel light
-  Simple modern design
-  Dual control, multiple control



-  Voice control
-  App control
-  Communicates with other devices







General	
Model Number	LS240
Wiring	Live+neutral
Control Unit	16A magnetic latching relay
Operating Temperature	-5~45°C
Operating Humidity	5~90%
Power Supply	AC 100-240V 50/60Hz
Power Consumption	< 0.6W
Maximum Overload	Resistive load:500W per channel Inductive/Capacitive load :200W per channel
Indicator	16Milion colors,brightness adjusted
Radio	
Radio Protocol	CoSS
Range (Open Field)	200m

Construction	
Color	White/ Gray
Dimensions	86*86*36mm
Casing	Bottom Cover:PC,Top Cover:ABS+PC

BLEND Switch PRO (Metal)

Frameless and Simple

-  Microswitch makes the button feel more comfortable
-  Metal material with anodic oxidation processing technology
-  Micro hole and DIY LED indicator light
-  Simple and borderless design



 Voice control  App control  Communicates with other devices






General	
Model Number	LS240-MA1/LS240-MA2/LS240-MA3
Installation	In-wall concealed with 86 back box
Wiring	Live+neutral
Operating Temperature	-5~45℃
Operating Humidity	5~90%
Power Supply	AC 100-240V 50/60Hz
Power Consumption	<0.6W
Maximum Overload	Resistive load:500W per channel Inductive/Capacitive load:200Wper channel

Radio	
Radio Protocol	CoSS
Range(Open field)	200m

CUBE Clicker

A simple click to run complex scenes

-  Compact size and could be placed anywhere
-  Easily switch to different scenes
-  Multiple color options(White/Red/Wood)



 Voice control  App control  Communicates with other devices



General	
Model Number	LS069WH/RD/WG / LS151WH (Japan)
Operating Temperature	-5~45℃
Operating Humidity	5~90%
Power Supply	1 Battery CR2450, 3V
Battery Life	Up to 1 year
Button	Control button pairing button
Indicator	LED

Radio	
Radio Protocol	CoSS
Signal Range (Open Field)	100m

Construction	
Color	White / Red / Wood
Size	38.4*38.4*14.6mm
Weight	20g
Casing	ABS+PC

Polar Switch

Independent power supply, perfect solution for 120 live-only wiring switches



Simple modern design



No flicker, safe and stable



No need of external wiring



Dual control, multiple control



Voice control



App control



Communicates with other



General	
Control Unit	16A magnetic latching relay
Operating Temperature	-5~45°C
Operating Humidity	5~90%
Power Supply	DC 5V-30V Or AC 90-250V
Static Consumption	< 1mW
Maximum Overload	Resistive load 500W (one way) Capacitive/Reductive load 200W (one way)
Battery Type	CR123A
Battery Lfie	5 years

Radio	
Radio Protocol	CoSS
Signal Range (Open Field)	200m

Construction	
Color	White
Dimension	120*70*35mm
Casing	ABS+PC

Polar Switch (1 way)	
Model Number	LS211-WH1
Wiring	Live Only
Weight	103g

Polar Switch (2 way)	
Model Number	LS211-WH2
Wiring	Live Only
Weight	112g

Polar Switch (3 way)	
Model Number	LS211-WH3
Wiring	Live Only
Weight	123g

Polar Switch (Live&Neutral)

Independent power supply,perfect solution for 120 wiring switch



Simple modern design



Screw-free wiring



LED status indication



Dual control, multiple control




Voice control



App control



Communicates with other



General	
Control Unit	16A magnetic latching relay
Operating Temperature	-5~45°C
Operating Humidity	5~90%
Power Supply	AC 100-240V 50/60Hz
Static Consumption	< 0.6W
Maximum Overload	Resistive load 500W (one way) Capacitive/Reductive load 200W (one way)

Radio	
Radio Protocol	CoSS
Signal Range (Open Field)	200m

Construction	
Color	White
Dimension	120*70*35mm
Casing	Bottom Cover:PC, Top Cover:ABS+PC





Polar Switch (1 way)	
Model Number	LS221-WH1/LS221-JW1
Wiring	Live+Neutral
Weight	121g

Polar Switch (2 way)	
Model Number	LS221-WH2/LS221-JW2
Wiring	Live+Neutral
Weight	127g

Polar Switch (3 way)	
Model Number	LS221-WH3/LS221-JW3
Wiring	Live+Neutral
Weight	133g

Two Channel Dimmer Controller (0-10V)

Enjoy smooth brightness adjustment experience

- Adjustable lighting brightness and color temperature
- 0-10V dimming technology
- Supports control of up to 50 lights
- Soft transition of dimming lights



 Voice control  App control  Communicates with other devices

 Works with Apple HomeKit  works with the Google Assistant  WORKS WITH amazon alexa




General	
Model Name	LS255
Wiring	Live, neutral, L0, DIM1+, DIM2+, GND, Light control
Control Unit	0/1-10V Dimmer control(Two way)
Compatible Lights	0/1-10V Dimmer&color temperature control lamp, Maximum 50 lamps(within 100mA)
Operating Temperature	-5~45℃
Operating Humidity	5~90%
Power Supply	AC 100-240V 50/60Hz
Power Consumption	<1W
Maximum Overload	-
Button	Pairing&matching butto
Indicator	LED

Radio	
Radio Protocol	CoSS
Signal Range (Open Field)	100m

Construction	
Color	White
Size	40*150.5*28mm
Weight	74g
Casing	PC

CUBE Switch Module

Make troditional switch into a smart one

- The most compact smart switch module ever
- Update a traditional switch to a smart one
- Strong compatibility to different switch size



 Works with Apple HomeKit  works with the Google Assistant  WORKS WITH amazon alexa

 Voice control  App control  Communicates with other devices

Radio	
Radio Protocol	CoSS
Signal Range (Open Field)	100m


General	
Operating Temperature	-5~45℃
Operating Humidity	5~90%
Power Supply	AC 100-240V 50/60Hz
Static Consumption	< 0.3W
Maximum Overload	Resistive load 300w per channel inductive/capacitive lead:150w per channel
Indicator	LED
Button	Pairing button
Wiring	Live+neutral

Construction	
Color	Ivory white
Casing	Flameresistant PC

One Way	
Model Number	LS176
Control unit	8A magnetic latching relay (one way)
Size	42*32*16mm
Weight	20g

Two Way	
Model Number	LS177
Control unit	8A magnetic latching relay
Size	42*32*16mm
Weight	25g






 Works with Apple HomeKit  works with the Google Assistant  WORKS WITH amazon alexa

Three Way	
Model Number	LS193
Control Unit	16A Magnetic latching relay
Size	47*44*22mm
Weight	50g

Dimmer & Motion Sensor Switch

Customize your own brightness with motion detection

-  Multiple ways of lighting adjustment
-  Automatically switch on and off by human motion detection
-  Precise brightness control by percentage



 Voice control  App control  Communicates with other devices




 Works with Apple HomeKit  works with the Google Assistant  WORKS WITH amazon alexa

General	
Product Type	Wall mount switch
Wiring	Live+neutral
Control Unit	Triac control unit(one way)
Conpatible Lights	Filament, halogen, LED lamp or other lamp with triac control
Operating Temperature	-5~45℃
Operating Humidity	5~90%
Power Supply	AC 100-240V 50/60Hz
Static Consumption	<1W
Maximum Overload	Resistive load: 250W Inductive/Capacitive load: 200W
Button	Dimmer button (Pressable) pairing&matching button Safety button
Indicator	Dimmer indicator light
Motion Detection	Yes (embeded motion sensor)
Light Detection	Yes (embeded light sensor)

Dimmer&Motion Sensor Switch	
Model Number	LS174 / LS154 (Japan)
Radio Protocol	CoSS
Radio	
Signal Range (Open Field)	100m
Construction	
Color	Ivory white
Dimension	120*70*47mm (with dimmer button) 68*40*27mm (flush-mount)
Weight	110g
Casing	Bottom cover: PC, others: ABS+PC

Moonstone Switch 120

Touchable switch leads you into a simple smart life

-  Simple modern design, jade like touch
-  Customized 16 million colors indicator light
-  Dual control, multiple control



 Voice control  App control  Communicates with other devices

 Works with Apple HomeKit  works with the Google Assistant  WORKS WITH amazon alexa



General	
Wiring	Live+neutral
Control Unit	10A magnetic latching relay
Operating Temperature	5~45℃
Operating Humidity	5~90%
Power Supply	AC 100-240V 50/60Hz
Static Consumption	< 1.5W
Maximum Overload	Resistive load: 500W per channel Inductive/Capacitive load: 200W per channel
Indicator	16Million colors

Construction	
Color	White glass+White frame/ Black glass+White frame
Dimension	120*72*35mm
Casing	Bottom cover: PC, top cover: ABS+PC, front panel: glass

Moonstone Switch 120 (1 way)	
Model Number	LS123WH/BL
Weight	151g
Moonstone Switch 120 (1 way)	
Model Number	LS124WH/BL
Weight	158g
Moonstone Switch 120 (1 way)	
Model Number	LS125WH/BL
Weight	167g
Radio	
Radio Protocol	CoSS
Signal Range (Open Field)	200m

Triac Dimmer Switch

LifeSmart's designed knob panel for the lighting industry

-  Metal knob, undamped knob construction, glass panel
-  Dimming through the triac control unit



 Voice control  App control  Communicates with other devices





General	
Model Number	LS223BL
Installation	In-wall concealed with 86 back box
Operating Temperature	-5~45℃
Operating Humidity	5~90%
Interface	L out, L in, N
Power Supply	AC 100-240V ~ 50/60Hz
Static Consumption	<0.6W
Maximum Overload	Resistive load 350W, Capacitive load 200VA

Radio	
Radio Protocol	CoSS
Signal Range(Open Field)	200m

Construction	
Color	White Frame Black Glass
Dimension	Outside the wall:86*86*28mm Whole product:86*86*53mm
Casing	Panel: Glass, Top cover: ABS+PC, Base: PC, Knob: Anodized aluminum alloy
Weight	135g

Nature Switch (Heavy Duty)

A smart switch designed to control high power machine or device.

-  Can withstand high current and control the live and neutral loop connect or disconnect at the same time
-  The high-power latching relay



 Voice control  App control  Communicates with other devices



General	
Model Number	LS220-GRH
Installation	In-wall concealed with 86 back box
Operating Temperature	-5~45℃
Operating Humidity	5~90%
Interface	Lin, Lout, Nin, Nout, Earth;
Indicator	Customizable RGB LED icon
Power Supply	AC 100-240V~ 20A

Radio	
Radio Protocol	CoSS
Signal Range(Open Field)	200m

Construction	
Color	White/Gray Frame Black Glass
Dimension	Outside the wall:86*86*11mm Whole product:86*86*37.5mm
Casing	Flameresistant PC

HOME SECURITY


DEFED Alarm Kit

- Anti-tamper Design for All Devices
- GSM Alarm Message
- Millisecond Response
- Power-off Prevention
- Compatible with 3rd-party Cameras
- Smart Linkage with Other Smart Home Devices




DEFED Motion Sensor


DEFED Motion sensor is a motion sensor depending on passive infrared sensing technology




Tamper protection




Long detection distance up to 12M





Battery life up to 7 years



Adjustable sensitivity

 App control

 Communicates with other devices






General	
Model Number	LS203WH
Installation	Wall mount
Operating Temperature	-5~45℃
Operating Humidity	5~90%
LED Indicator	Yes
Static Consumption	≤0.05mw
IR Detection Range	Up to 12m
IR Detection Angle	Up to 90°
Power Supply	Battery CR123A, 3V
Battery Life	Up to 7 years

Construction	
White/Black	White
Dimension	100*59.2*67.3mm (with bracket) 100*59.2*50mm (sensor only)
Casing	ABS+PC
Net Weight (with battery)	110g (with battery)


Radio	
Radio Protocol	CoSS
Signal Range(Open Field)	800m

DEFED Door/Window Sensor


The Door/Window opening contact applicable for almost all windows or doors as you want




With temperature detection and LED indicator




Tamper protection and alarm





800m wireless distance (open field)



Battery life up to 10 years

 App control

 Communicates with other devices





General	
Model Number	LS202WH
Operating Temperature	-5~45℃
Operating Humidity	5~90%
Power Supply	1 Battery CR123A, 3V
Power Consumption	Static power consumption≤0.01mw
Battery Life	Up to 10 years
Sensitive Element	Magnetic sensor, temperature sensor
Activation Distance	2.5cm
Interface	NC interface for extended sensor
Button	Power switch button
LED Indicator	LED×1
Screen	-
Audio	-

Radio	
Radio Protocol	CoSS
Radio Frequency	433MHz
Signal Range (Open Field)	800m

Construction	
Color	White
Dimensions	Sensor: 22*22*89mm, Magnet: 10*12*89mm
Weight	44g
Casing	PC

DEFED Indoor Siren

DEFED Indoor siren is the sound notifier of alarm system. When there is an alarm message is triggered, a loudly notification will produced by this equipment

- 105
dB

Maximum sound can be up to 105dB
- 5
YEARS

Battery life up to 5 years
- ✓

Tamper protection



- 📱

App control
- 🔗

Communicates with other devices


General	
Model Number	LS204WH
Installation	Wall mount
Operating Temperature	-5~45°C
Operating Humidity	5~90%
LED Indicator	Yes
Static Consumption	≤0.3mw
Interface	Interface for extended LED
Power Supply	Indicator
Sound Volume	2 Battery CR123A, 3V
Buzzer Operating Frequency	87~105dB at a distance of 1m
Battery Life	3500 ± 500Hz


Radio	
Radio Protocol	CoSS
Signal Range (Open Field)	800m


Construction	
White/Black	White
Dimension	85.6*85.6*34mm
Casing	ABS+PC
Net Weight (with battery)	130g


DEFED Key Fob

The most convenient portable controller for your alarm system

- 

Customized button for scene triggering
- 

Both for alarm system and smart home system
- 

800m wireless distance transmission (open field)
- 

LED indicator for visual feedback



- 📱

App control
- 🔗

Communicates with other devices







General	
Model Name	LS201WH
Operating Temperature	-5~45°C
Operating Humidity	5~90%
Power Supply	1 Battery CR2450, 3V
Battery Life	Up to 10 year
Button	4 Button
Indicator	LED

Radio	
Radio Protocol	CoSS
Signal Range (Open Field)	800m

Construction	
Color	White
Size	74*39*11.9mm
Weight	19g
Casing	PC

CUBE Motion Sensor

A tiny Motion sensor combined PIR technology and light detection

-  120° wide angle detection
-  Built-in light sensor to switch day/night mode
-  Notifications and record searching via the app
-  Compact size and could be placed anywhere



 App control

 Communicates with other devices







General	
Model Number	LS062WH / LS150WH (Japan)
Operating Temperature	-5~45°C
Operating Humidity	5~90%
Power Supply	1 Battery CR2450, 3V
Static Consumption	<1mW
Battery Life	Up to 1 year
Sensitive Element	Passive infrared sensor, light sensor
Detection	5m/120°
Interface	-
Button	-
Indicator	LED
Display	-
Audio	-

Radio	
Radio Protocol	CoSS
Signal Range (Open Field)	100m

Construction	
Color	Ivory white
Dimensions	38.4*38.4*22.4mm
Weight	20g
Casing	ABS+PC

CUBE Environmental Sensor

One device to simultaneously monitor the temperature, humidity and illumination and indicate these data with a LCD display

-  Built-in multiple sensors including temperature detection, humidity detection and light detection
-  Real-time data display on the screen
-  Notifications and record searching via the app
-  Tiny size and could be placed anywhere



 App control

 Communicates with other devices




General	
Model Number	LS063WH / LS091WH (Japan)
Operating Temperature	-5~45°C
Operating Humidity	5~90%
Power Supply	1 Battery CR2450, 3V
Static Consumption	<1mW
Battery Life	Up to 1 year
Sensitive Element	Temperature sensor, humidity sensor, light sensor
Interface	-
Button	Pairing button
Indicator	LED
Display	LCD
Audio	-


Radio	
Radio Protocol	CoSS
Signal Range (Open Field)	100m


Construction	
Color	Ivory white
Dimensions	38.4*38.4*16.2mm
Weight	24g
Casing	ABS+PC


CUBE Door/Window Sensor

A simple-to-install door/window sensor combined magnetic sensor and vibrating sensor

- 

Remote alarm once opening or vibrating detected
- 

Real-time feedback on door/window status
- 

Notifications and record searching via the app
- 

One-button for scenes control



 App control  Communicates with other devices




General	
Model Number	LS058WH / LS149WH (Japan)
Operating Temperature	-5~45°C
Operating Humidity	5~90%
Power Supply	1 Battery CR2450, 3V
Static Consumption	<1mW
Battery Life	Up to 1 year
Sensitive Element	Magnetic sensor, vibration sensor
Detection	Slide and shake detection of the door and window
Interface	-
Button	Customizable button, pairing
Indicator	button
Display	LED
Audio	-


Radio	
Radio Protocol	CoSS
Signal Range (Open Field)	100m


Construction	
Color	Ivory white
Dimensions	38.4*38.4*14.6mm
Weight	20g
Casing	ABS+PC


Household Gas Detector (ZigBee)


Every gas leak can be detected and alerted in time

- 

Advanced gas-sensitive elements
- 

High sensitivity and stable operation
- 

Embedded ceiling mouting
- 

Support sound and light/wireless network alarm
- 

Maximum sound can be up to 70dB



 App control  Communicates with other devices





General	
Model Number	JT-GA102
Installation Method	Ceiling-mounted
Operating Temperature	0~55°C
Operating Humidity	≤95%RH
Power Supply	AC 100~240V
Standby Current	<100mA
Alarm Current	<150mA
Detection Gas Type	Methane (natural gas)
Alarm Gas Concentration	8%LEL
Concentration Error Range	±3%LEL
Sound Alarm	Alarm speaker Alarm sound pressure ≥70db (1m in front of the detector)

Radio	
Radio Protocol	ZigBee 3.0
Range (Open Field)	80m

Construction	
Color	white
Dimensions	ø80×ø65x45mm
Weight	108g
Casing	PC,ABS

Independent Photoelectric Smoke Detector (ZigBee)

Sensitive detection to prevent fires before they happen

-  Stable and sensitive photoelectric sensor
-  Product certification:CCCF/ROHS/CE
-  High decibel alarm volume
-  Battery life up to 3 years



 App control  Communicates with other devices




General	
Model Number	MIRSM100
Installation	Ceiling
Operating Temperature	-10~50℃
Operating Humidity	≤95%RH
Power Supply	DC 3V (CR123A battery)
Standby Current	<15uA
Alarm Current	<40mA
Battery Life	More than three years (20times/day)
Remote Frequency	2.4GHz
Alarm Sound Pressure	≥80 dB (3 m in front of the smoke detector)

Radio	
Radio Protocol	ZigBee 3.0
Range (Open field)	50m

Construction	
Color	White
Dimensions	φ90*37mm
Weight	106g
Casing	PC,ABS

Human Presence Sensor (Radar Detector, ZigBee)

Better sensors, better smart experience

-  Sensing range (sensitivity) 0~100% adjustable in ten steps
-  Support changing the delay time, 30S~30min eight gears adjustable
-  Smaller size, ceiling flush support 55 holes



 App control  Communicates with other devices



General	
Model Number	MSA201 Z
Operating Temperature	0℃~50℃
Operating Humidity	-25℃~+80℃
Operating Voltage	AC 110V-240V 50/60Hz
Stand-by power	≤1W
Mounting height	2.5-4m
Detection Area(Note 1)	0%/10%/20%/30%/40%/50%/60%/70%/80%/90%/100%,Set via APP
Hold Time (Note 2)	30s/1min/2min/3min/5min/10min/20min/30min, Set via APP
Detection Range (Radius) (Note 3)	Big motion: 3-4m Minor motion: 2.5-3.5m Breathing: 2.5-3.5m
Cut-out size	Cut a hole of 55mm on the ceiling
Installation	Flush Mounted

Radio	
Radio Protocol	ZigBee
Range (Open field)	100m

Construction	
Color	white
Casing	ABS
Dimensions	Φ65xΦ52x49.5mm

Water Leak Sensor

Ensure safety and the comfort of use when there is water leak



Water leak detection



Real-time monitoring of your house safety



Notifications and record searching via the app

App control

Communicates with other devices



General	
Model Number	LS064WH
Operating Temperature	-5~45℃
Operating Humidity	5~90%
Sensitive Element	Leak sensor
Power Supply	1 Battery CR2450, 3v
Power Consumption	Static consumption<30μw Alarm consumption<100mw
Battery Life	Up to 1 year
Interface	Water sensing probe
Button	Pairing button
Indicator	LED
Display	-
Sound Alarm	-

Radio	
Radio Protocol	CoSS
Signal Range (Open Field)	100m
Construction	
Color	Ivory white
Dimensions	50*72*20mm
Weight	31g
Casing	ABS+PC

In-wall Air Quality Detector (ZigBee)

In-wall Air Quality Detector is an air quality monitor ingterminal that can be equipped with optional PM2.5 sensor,temperature and humidity sensor



Built-in high precision sensor



Real-time data display on TFT screen



24-hour air quality detection



APP real-time view of air quality

App control

Communicates with other devices




General	
Model Number	PMT300-SGM-ZTN
Installation	In-wall concealed with 86 back box
Operating Temperature	-10~55℃
Operating Humidity	≤95% (non-condensing)
Power Supply	AC 100-240V
Operating current	≤100mA
Detection type	PM2.5 Temperature and Humidity
PM2.5 Range	0~999ug/m3
Screen	TFT screen


Radio	
Radio Protocol	ZigBee 3.0
Signal Range (Open Field)	80m
Construction	
Color	Black
Dimensions	86*86*60mm
Weight	172g
Casing	PC,ABS

Gas Sensor


A gas sensor with sound alarm for immediate notifying




Multi-type gas detection including methane, natural gas and biogas




Real-time monitoring of your house safety




Notifications and record searching via the app



Built-in sound alarm



App control



Communicates with other devices



General	
Model Number	LS086WH
Operating Temperature	-5~45°C
Operating Humidity	5~90%
Detecting Types	Methane、natural gas、biogas
Sensitive Element	Gas sensor
	Concentration range: 300~10000ppm
Sensitivity adjustable	
Power Supply	DC 5V
Power Consumption	450mW
Battery Powered	No
Battery Type	-
Interface	Micro usb power supply×2
	(Two orientations, only need to connect one of them)
Button	Self-checking button
	Pairing button
Indicator	LED
Sound Alarm	Alarm speaker
	Alarm sound pressure>70db/m

Radio	
Radio Protocol	CoSS
Signal Range (Open Field)	200m

Construction	
Color	Ivory white
Dimensions	71*71*32mm
Weight	55g
Casing	ABS

Smart Door Lock C200

Make you safe and worry-free every time you open the door



4 dry cell batteries, type-c emergency power supply



5 types of access



Multiple warning for safety



Self-developed CoSS module



App control



Communicates with other devices



General	
Model Number	C200
Unlocking ways	Fingerprint/Password/Mechanical Key / LifeSmart App/Electronic Encryption Card
User Capacity	50 groups
Fingerprint Reader	Semiconductor sensor
Password Input	Touch key
Password Function	Virtual password; Password protection
Chip System	Dual CPU and dual system
Fingerprint Identification Time	< 0.5s
Up-down Hook	Support
Cylinder Lock	Grade C
Mechanical Keys	2
Power Supply	4 AA dry batteries,
	Type-C emergency power supply
Operating Temperature	-25°C-70°C
Suitable Door Thickness	40-120mm
Suitable Lock Body	J6068 (Standard)

Radio	
Radio Protocol	CoSS
Range (Open field)	100m

Construction	
Color	Black and Gold
Dimension	360*73*23mm
Casing	Aluminum alloys + IML

Indoor Camera (4MP)

An intelligent indoor camera with human detection, allowing you to monitor what matters, without receiving annoying false alerts



Smart Tracking: Automatically tracks moving objects



Privacy Mode: Hide the lens to protect your personal privacy



Abnormal Sound Alarm



Two-way Talk: Communicate with family and pets easily



Voice control



App control



General	
Model Number	LS278
Imaging Device	1/3"
Effective Pixels	4MP: 2560(H)×1440(V)
Scanning System	Progressive CMOS
Video Compression	H.265/H.264
Wi-Fi	IEEE802.11b/g/n
Video Compression Format	H.265/H.264
Video Quality Ajustment	128Kbps ~ 4Mbps
Open Field	50m
Operating Conditions	-10°C~+45°C, Less Than
Ingress Protection	95%RH
Power Supply	IP66
Power Consumption	DC 5V1A





Lens Type	
Fixed Lens	3.6mm
Field of View	75°(H), 42°(V), 89°(D)
Night Vision	10m(33ft) Distance
Lens Type	Fixed

Operational	
Smart Features	Motion Detection、Human Detection、Configurable Region、Abnormal Sound Alarm

Construction	
Color	white
Dimension	77.4× 77.4 × 106.1mm
Weight	197g

Indoor Camera

An intelligent indoor camera with human detection, allowing you to monitor what matters, without receiving annoying false alerts

-  1080P high definition real-time monitoring
-  Two-way talk
-  IR night view
-  Communicates with other devices and alarm notifications



 Voice control  App control

General	
Model Number	LS258
Fov	80±5° (Horizontal)
Operating Temperature	-5~45℃
Operating Humidity	5~90%
Power Supply	DC 5V
Power Consumption	<5W
Battery	No
Interface	Micro USB power input TF card slot
LED Indicator	Blue
Ingress Protection	Indoor
Network	Wi-Fi 2.4GHz
Button	Pairing/operating button
Resolution	1080P
Compression	H.264
Night View	IR 8m
PTZ	Horizontal 345° remote panning Vertical 90° remote tilting





Audio	
Two-way Talk	Yes
Audio Message	No
Speaker	1
Mic	1

Storage	
Built-in Storage	No
External Storage	TF card

Construction	
Color	Ivory white
Dimension	70*70*110mm
Weight	220g
Casing	ABS

Outdoor Camera

1080P outdoor camera with sound-light alarm to actively guard your house 24/7

-  1080P high definition real-time monitoring
-  Active deterrence with sound-light alarm
-  IR night view
-  IP66 ingress protection for outdoor installation



 Voice control  App control  Communicates with other devices

General	
Model Number	LS259
Fov	110°
Operating Temperature	-5~45℃
Operating Humidity	5~90%
Power Supply	DC 12V
Power Consumption	<12W
Battery	No
Interface	Power port Ethernet port/PoE power port Antenna port TF card slot
LED Indicator	No
Ingress Protection	Indoor/Outdoor IP66
Network	Wi-Fi 2.4GHz
Button	Pairing/operating button
Resolution	1080P
Compression	H.264
Night View	IR 15m
PTZ	Manual adjustment

Audio	
Two-way Talk	Yes
Audio Message	No
Speaker	1
Mic	1

Storage	
Built-in Storage	No
External Storage	TF card

Construction	
Color	Ivory white
Dimension	70*70*184mm
Weight	411g
Casing	Aluminium alloy

Smart Curtain Motor

Turn your traditional curtains into smart ones




One tap to control the whole shading system



Scheduled task



Accurate control by percentage

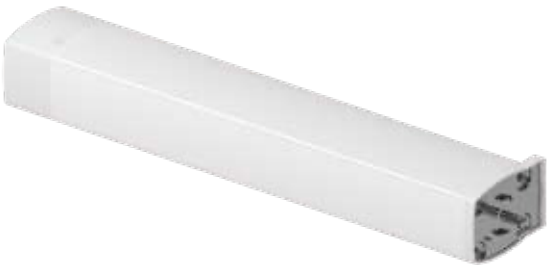

Voice control



App control



Communicates with other devices



General

Model Number	LS133WH
Moving Speed	14cm/s
Rated Torque	1.2Nm
Operating Temperature	-5~45℃
Operating Humidity	5~90%
Ingress Protection	IP40
Power Supply	AC 100V-240V 50/60Hz
Power Consumption	13W
Power Cable Length	125cm
Interface	Serial port
	Weak Current switch interface
Indicator	LED
Maximal Track Length	8m
Maximal Load	50Kg

Radio

Radio Protocol	CoSS
Signal Range (Open Field)	100m





Button	Reset/Receiver pairing button
	Smart station pairing button
Ingress Protection	IP40
Strong Power	Yes
Weak Power	Yes
Receiver Control	Yes
Electronic Limit Switch	Yes
Manual Contraol	Yes
3rd Intermediate Limit Position	Yes
Obstacle Stop Function	Yes
Hand Operable During Power-off	Yes
Auto End Limits Setting	Yes

Construction

Color	White
Dimensions	365*60*50mm
Weight	1.3KG
Casing	Aircraft aluminum


DC Tubular Motor (V2)

Inspired by classic modernist design

-  Large torque 5N.m, goodbye to heat
-  Wide voltage, multiple scenarios
100-240V
-  Three speed adjustments
-  Suitable for a variety of curtains



 Voice control  App control  Communicates with other devices







General	
Model Number	TP35-5/26EHU
Installation	In-wall concealed with 86 back box
Operating Temperature	-15°C-55°C
Operating Humidity	5~75%
Interface	Live, Neutral, Curtain open, Curtain close
Power Supply	close
Static Consumption	AC 100-240V 50/60Hz
Maximum Overload	<1.5W

Construction	
Color	White
Dimensions	36.4*540.5mm
Casing	Aluminum alloys
Radio	
Radio Protocol	CoSS
Signal Range (Open Field)	200m

DC Tubular Motor

LifeSmart DC Tubular Motor can replace the traditional shutter motor to link the roller blind to your smart home system

-  Quiet motor below 28dB
-  Precise limit state control
-  Remote control via App
-  Timing schedule







 Voice control  App control  Communicates with other devices



General			
Model	WSER30-T-2/20	Nominal Current	0.09A
Dimension	φ25*450mm	Net weight	6Kg
Rated Torque	2 N.m	Ingress Protection	IP20
Output Speed	20 rpm	Maximum Turns	∞
Running Noise	28db	Wireless Communication	CoSS
Nominal Consumption	15.4W	Communication Distance	Up to 200m (Open field)
Nominal Voltage	AC100-240V		

Silent Track Curtain Motor

Silent Track Curtain Motor. Soak In The Silence

-  30dB silence design
-  Universal adapter
-  5 Certifications(3C/CE/PSE/FCC/RCM)
-  Voice control(Work with Apple HomeKit, Amazon Alexa and Google Assistant)







 Voice control  App control  Communicates with other devices




General			
Model	BCM500DS	Power Supply	AC100-240V 50/60Hz
Casing	Aluminum Alloy	Maximal Load	50Kg
Dimension	50mm*55mm*315mm	Ingress Protection	IP20
Rated Torque	1.2 N.m	Insulation Class	CLASS F
Moving Speed	12cm/s	Ingress Protection	CoSS
Power Consumption	40W	Signal Range	200m (open field)


QuickLink Curtain Motor

Turn your traditional curtains into smart ones

-  Adjustable track length
-  One tap to control the whole shading system
-  Scheduled task
-  Accurate control by percentage



 Voice control  App control  Communicates with other devices



General			
Model Number	BCM100D	Maximal Load	40Kg
Curtain Track Length	Maximal 5.2m	Indicator	LED
Moving Speed	12cm/s	Ingress Protection	IP20
Rated Torque	1.2Nm	Strong Power	Yes
Operating Temperature	-20~85°C	Weak Power	Yes
Operating Humidity	0~80%	Receiver Control	Yes
Power Supply	100-240V AC 50/60Hz	Electronic Limit Switch	Yes
Power Consumption	40W	Manual Contraol	Yes
Power Cable Length	85cm	3rd Intermediate Limit Position	Yes
Interface	RJ11	Obstacle Stop Function	Yes
Button	Coding / Setting button	Hand Operable During Power-off	Yes
Track Set	Track(1m)* 4, track (0.5m), track(0.2m)*2, track(0.1m), connector(0.2m), connector(0.1m)*5	Auto End Limits Setting	-

Radio	
Radio Protocol	CoSS
Signal Range (Open Field)	100m

Construction	
Color	White
Dimensions	270*50*50mm
Weight	5kg
Casing	ABS, aluminum



BLEND Curtain Controller PRO

Inspired by classic modernist design



Inspired by classic modernist design



Two color for optional



Make traditional curtain motor smart



Remotely control the curtain via mobile app or Nature panel series



Voice control



App control



Communicates with other devices






General	
Model Number	LS240-WCN、LS240-GCN
Installation	In-wall concealed with 86 back box
Operating Temperature	-5~45°C
Operating Humidity	5~90%
Interface	Live, Neutral, Curtain open, Curtain close
Power Supply	AC 100-240V 50/60Hz
Static Consumption	<1.5W
Maximum Overload	200W

Construction	
Color	White/Gray
Dimensions	86*86*36.5mm
Casing	Panel: ABS+PC, Control Accessory: PC

Radio	
Radio Protocol	CoSS
Range(Open field)	200m

Nature Mini PRO (Thermostat)

Fan coil and floor heating two-in-one thermostat features with gateway and touch screen

- <5>
- Five modes : Fan Coil & Water Floor Heating, Single Fan Coil, Double Fan Coil, Water Floor Heating, Ventilation
-  Intelligent temperature adjustment
-  Remote control
-  Energy saving

-  App control
-  Communicates with other devices



General	
Model Number	LS268-WT1/GT1
Installation	In-wall concealed with 86 back box
Operating Temperature	-5~45°C
Operating Humidity	5~90%
Network	Wi-Fi 2.4GHz/5GHz
Interface	Low, Med, High, Val1, Val2, Live, Neutral;
Screen	4 inch
Resolution	480*480
Operation System	Linux
Power Supply	AC 100-240V 50/60Hz
Speaker	Yes


Construction	
Color	White/Gray
Dimension	Outside the wall:86*86*11mm; Whole product:86*86*36mm;
Casing	Flameresistant PC
Net Weight	156.8g(1 way) / 165.3g(2 way) / 173.9g(3 way)
Gross Weight	226.1g(1 way) / 234.2g(2 way) / 242.8g(3 way)


Radio	
Radio Protocol	CoSS, ZigBee, Wi-Fi
Signal Range(Open Field)	200m


General	
Functions	One-click pairing, device management, weather display, scenes control, multi GUI skin, device control, remote control via mobile app
Support Devices	All CoSS equipment, SONOS music box
Controllable Devices	Switches, lights, curtain motors, tubular motors, underfloor thermostats, fan coil thermostat, air conditioner gateways, electrical appliances(via SPOT-universal infrared controllers), etc.


Nature Thermostat (24V System)


Remotely control the temperature in your home


- 


Suitable for a variety of domestic, commercial and industrial scenarios
- 

Control the temperature at the end of the HVAC system
- 

Energy saving
- 

Voice control
- 

App control
- 

Communicates with other devices
- 




General	
Model Number	LS220-WT2/LS220-GT2
Installation	In-wall concealed with 86 back box
Operating Temperature	-5~45°C
Operating Humidity	5~90%
Interface	Y, W, G, C, R;
Screen	LCD
Power Supply	AC24V


Radio	
Radio Protocol	CoSS
Signal Range (Open Field)	200m


Construction	
Color	White Frame White Glass
	Gray Frame Black Glass
Dimension	Outside the wall:86*86*11mm Whole product:86*86*36mm
Casing	Flameresistant PC


Smart Central Air-conditioning Gateway


Connect VRV central AC to LifeSmart system with AC gateway


- 


Smart temperature adjustment
- 

Energy consumption saving
- 

Scheduled task
- 

Voice control
- 

App control
- 

Communicates with other devices
- 



General	
Model Number	LS175
Operating Temperature	-20~85°C
Operating Humidity	<80%
Power Supply	DC 12V
Static Consumption	<1.2W
Maximum Overload	-
Indicator	Yes
Display	Backlit display
Installation Method	-
Interface	Control output*14
	DC power in, RJ45
Button	Dial switch*2
	Set, Up, Down

Radio	
Radio Protocol	CoSS
Signal Range (Open Field)	100m

Function Info	
Mode	Cooling / heating / ventilation / dehumidification
Temperature Range	19-30°C
Set Stepping	1°C
Measurement Accuracy	-
Temperature Sensor	-

Construction	
Color	White
Dimensions	105*86*58mm
Weight	200g
Casing	Flameresitant ABS

RS485 Converter

Transfer RS485 signal to CoSS signal

- Support RS485 protocol communication
- Easy to integrate with 3rd party devices
- Multiple functions for energy usage monitoring of electric meter and controlling of traditional HAVC

- App control
- Communicates with other devices



General	
Model Number	LS080HV
Operating Temperature	-5~45°C
Operating Humidity	5~90%
Power Supply	AC 100-240V or DC12V
Power Consumption	Standby mode power consumption<1.5W
Interfaces	AD+, BD-, GND, DC+, 5V output


Radio	
Radio Protocol	CoSS
Radio Frequency	433MHz
Signal Range (Open Field)	200m

Construction	
Color	Ivory white
Dimensions	83.6*47.0*22.3mm
Weight	50g
Casing	ABS


Smart Plug

(ZigBee US, with Monitor Energy Usage)


US standard plug, changing traditional electronic appliances to be smart ones




Energy usage monitor




ZigBee 3.0 protocol



Wide voltage range



App control



Communicates with other devices



General	
Model Number	BSD57+
Installation	Plug and play
Operating Temperature	-20°C~+50°C
Operating Humidity	<80%
Operating Voltage	AC 100-240V 50/60Hz
Operating Frequency	2400 ~ 2483.5MHz
Maximum Load	1800W(16A)
Power Consumption	≤0.4W
Socket Standard	US Socket
Certification	CE, FCC


Radio	
Radio Protocol	ZigBee 3.0
Signal Range (Open Field)	50m

Construction	
Color	White
Dimension	83*37*52mm
Weight	PC+ABS(V0 Fire-protection)
Casing	73g


Smart Plug

(ZigBee UK, with Monitor Energy Usage)


UK standard plug, changing traditional electronic appliances to be smart ones




Energy usage monitor




ZigBee 3.0 protocol



Wide voltage range



App control



Communicates with other devices




General	
Model Number	BSD48
Installation	Plug and play
Operating Temperature	-5~45°C
Operating Humidity	5~90%
Operating Voltage	AC 100-240V 50/60Hz
Operating Frequency	2400 ~ 2483.5MHz
Maximum Load	3120W(13A)
Power Consumption	< 1.3W
Socket Standard	UK Socket


Radio	
Radio Protocol	ZigBee 3.0
Signal Range (Open Field)	50m


Construction	
Color	White
Dimension	58*58*56mm
Weight	PC
Casing	73g

General Controller

A professional engineer device, updating switches/buttons/sensors of dry contact to integrate with LifeSmart system perfectly and achieve intelligent control

- 

Stronge compatible for multiple smart home devices
- 

Easy to integrate 3rd party devices
- 

Multiple functions for light control, garage door control, etc.



 Voice control

 App control

 Communicates with other devices


General	
Model Number	LS143
Operating Temperature	-5~45℃
Operating Humidity	5~90%
Power Supply	DC 12V/24V
Power Consumption	Standby mode power consumption<1.5W
Maximum Overload	3A
Interfaces	5 control modes, 3 interfaces maximum


Radio	
Radio Protocol	CoSS
Signal Range (Open Field)	200m


Construction	
Color	Ivory white
Dimensions	83.6*47.0*22.3mm
Weight	50g
Casing	ABS

HA Interface Adaptor

A professional engineer device, updating switches/buttons/sensors of dry contact to integrate with LifeSmart system perfectly and achieve intelligent control

- 

Compact size
- 

Wall mount design, easy to incorporate
- 

Multiple functions for light control, garage door control, etc.



 Voice control

 App control

 Communicates with other devices

General	
Model Number	LS155
Operating Temperature	-5~45℃
Operating Humidity	5~90%
Power Supply	AC 100-240V 50/60Hz
Power Consumption	< 1W
Relay Overload	DC 30V 2A
Interfaces	AC 125V 0.5A
	HA Interface X 3
	Relay Interface X 3
Indicator Light	Input Indication Interface X 3
	Pairing
	Interface overall status (INFO)
Installation	Interface status X 9
	Wall mount

Radio	
Radio Protocol	CoSS
Range (Open Field)	100m

Construction	
Color	White
Dimensions	92*32*18.7mm
Weight	29g
Case	ABS+PC

Universal Remote Controller - SPOT

IR remote controller, USB interface, 16 million colors to create various lighting effects, ornamental and practical as a desktop storage unit



Universal IR remote control



Unique exterior design - ornamental and also practical as a desktop storage unit



Convenient USB charge interface



16 Million colors to create various lighting effects



Voice control



App control



Communicates with other devices



General	
Operating Temperature	-5~45℃
Operating Humidity	5~90%
Power Supply	DC 5V
Interfaces	Micro USB power supply USB output
Button	Configuration button
Indicator	16 million color
Remote Range	360°, 5-10m
Remote Frequency	38KHz

Software	
APP Control	Yes
Voice Control	Yes
Code Library Match	Yes
Code Library Update	Yes
Remote Control Learning	Yes

SPOT (WiFi Series)	
Model Number	LS136(CoSS)
Power Consumption	≤1.3W
Radio Protocol	Wi-Fi 2.4GHz
Signal Range (Open Field)	50m

SPOT (CoSS Series)	
Model Number	LS136 / LS152(Japan)
Power Consumption	≤1W
Radio Protocol	CoSS
Signal Range (Open Field)	100m

Construction	
Color	Ivory white
Dimensions	128*128*53mm
Weight	260g
Casing	ABS

SPOT Mini

All-in-one IR remote controller for active TVs, air conditioners, fans, DVDs, STBs, TV BOXes, etc. It covers nearly 6,386 brands of appliances in 109 countries



IR appliances control



Supports magnetically wall installation



Up to 12m infrared distance



Full angle IR remote range



App control



Communicates with other devices



General	
Model Number	LS251WH/LS252WH (Japan)
Installation	Wall mount/plug and play
Operating Temperature	-5~45℃
Operating Humidity	5~90%
Interface	Micro USB
Indicator	Green LED
Button	Paring button
Power Supply	DC 5V/2A
Power Consumption	<1W
Remote Frequency	38KHz
Remote Range	Vertical Direction: 180°
	Horizontal Direction: 360°
	Distance: 5-12m


Construction	
White/Black	White
Dimension	φ79.5*25mm
Casing	PC, ABS
Net Weight	70g

Radio	
Radio Protocol	CoSS
Signal Range(Open Field)	200m

Smart Residence



As the nominated supplier of the smart home solution for the Beijing 2022 Winter Olympics, LifeSmart equips the Beijing Winter Olympics Village with the full smart home solutions integrating smart curtains, smart plugs, door/window sensors, motion sensors, smart HVAC, and smart lighting. These solutions create residential environments featuring comfortability, safety, intelligence, and energy efficiency.

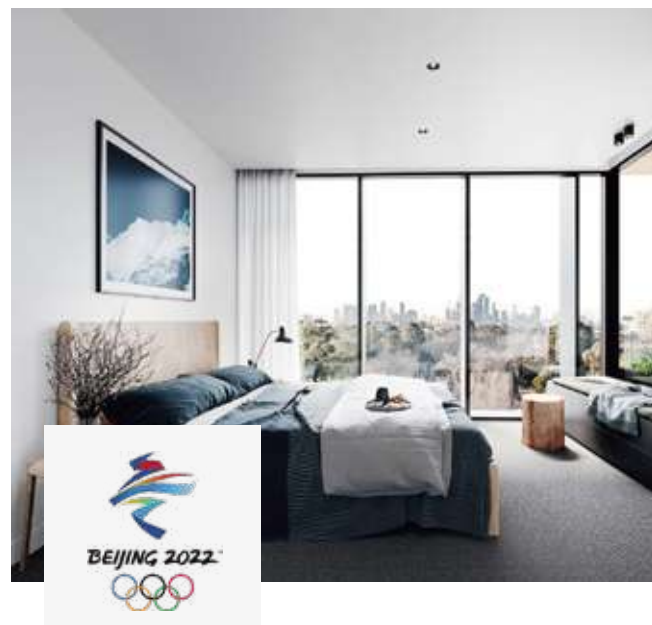

AP Group, Thailand



List Properties, Japan



Lixil, Japan



Country Garden, Malaysia



Shahan Tower, Iraq



Greentech Land, Philippines

Smart Hotel

LifeSmart provides hotel partners with energy-saving, comfortable, efficient, and safe all-scene smart products, and creates high-quality hotel services and lifestyles for consumers. The industry-leading smart hotel management system can significantly improve hotel operation efficiency and reduce hotel management costs, helping hotel partners maximize their revenue.

1 Check-in

Online Room Selection

Self Check-in

2 During the stay

Smart Door Lock

Smart HVAC

Voice Control

Smart Lighting

Smart Shading


APP Control

3 Check-out

Online Check-out

Online Feedback

Invoicing Appointment

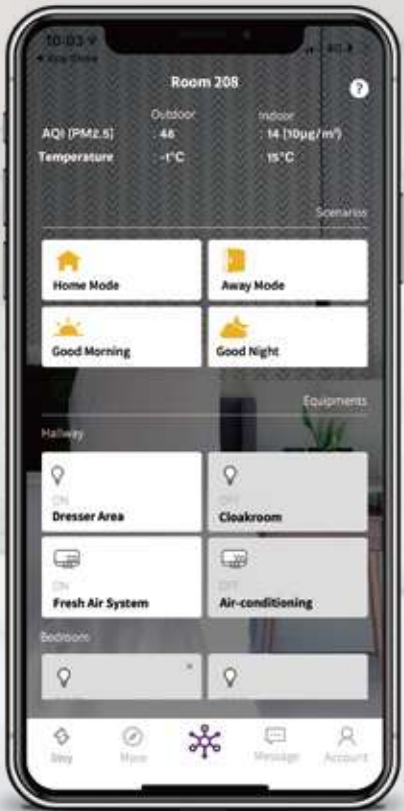

Stey

As a co-living brand from Northern Europe, Stey has created an innovative blend of home, co-living space and hotel, combining traditional hospitality with the smart digital solutions powered by LifeSmart.

Stey has redefined the “link” between people and space by using the advanced AI and IoT technology. We believe that design and technology will deeply change our daily life. LifeSmart and Stey will together deliver a new living experience for every single customer.

Smart Office

LifeSmart Smart Office Solution is committed to providing enterprises with the ultimate energy management strategy, efficient space operation strategy, and humanized light adjustment strategy. We use cloud computing and edge computing technology, combined with our software and hardware product capabilities, to digitize the office, and use a visual management system to empower the modern management of the enterprise.



LifeSmart offers smart office solutions to the Alibaba headquarter office (290,000 square meters), Baidu headquarter office (160,000 square meters), and Huawei Indonesia office (13,600 square meters). The powerful LifeSmart Enterprise Platform gives us not only the wireless control of all smart devices under our brand but also access to the intelligent office management systems of our

LifeSmart provides different scenario-based solutions for the office area and meeting rooms. Operations on air conditioners, lights, and curtains can be automatically triggered in accordance with the users' habits in the office, making the office more intelligent, comfortable, and energy-efficient.

